

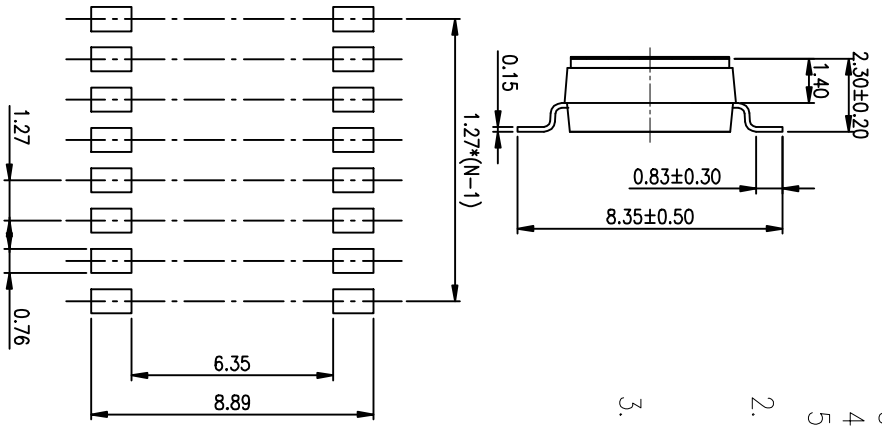


PRODUCT NO.	DSHP08TSGER
RoHS compliant	


NOTES :1.Specification:

- 1> Operating force: 1000gf Max
- 2> Operating Temperature: -40° to+85°
- 3> Storage Temperature: -40° to+85°
- 4> Electrical Life: 1000cycles 25mA 24VDC
- 5> Mechanical Life: 3000cycles Operations

2. PLATING:  
GOLD FLASH 1u"~2u" SOLDER TAIL,  
1u"~3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATING OVERALL.
3. PART NUMBER DESCRIPTION :  
DSHP XX I S G E R

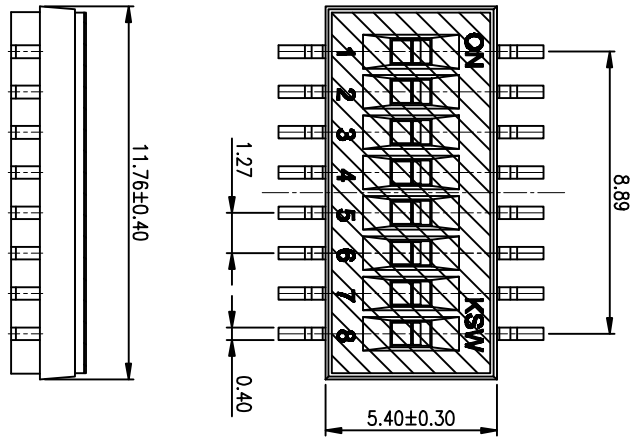

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



- [包装方式: T=管装 R=Reel]
- [电镀层: B=鍍鍍部1u"~3u" 焊脚部1.2u" G=鍍鍍部30u" 焊脚部30u" F=鍍鍍部10u" 焊脚部10u"
- [G=鍍全金 S=内鍍金(接触部) 外鍍鍍(焊脚部) ]
- [脚型: S脚 / J脚 / 埋脚 / A脚 / 2脚]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

1	2	3	4	5	6	7
1	2	3	4	5	6	7

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		TITLE	
LINER	ANGLES	PROJECTION			
0 ± 0.25	0 ± 2'	ASME Y14.5	總督精密有限公司		
.00 ± 0.15	.0 ± 1'		KINGTEK INDUSTRIAL CO.,LTD		
.000 ± 0.10	.00 ± 0.5'		BY DSHP SERIES PITCH 1.27mm		
DESIGN	kathy	03/20/12	PRODUCT FAMILY DSHP SERIES		
DRAWING			PRAT NO. DSHP08TSGER		
CHECK			FILE NO. DSHP08TSGER-A		
APPRO.			SIZE UNIT SCALE SHEET REV.		
			A4 mm Z : 1 1OF 1 A		