
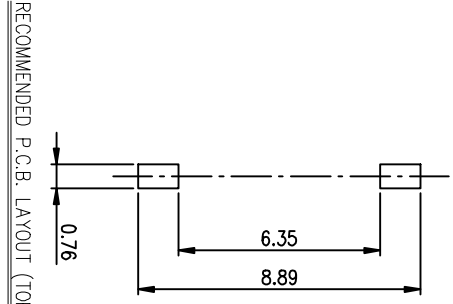


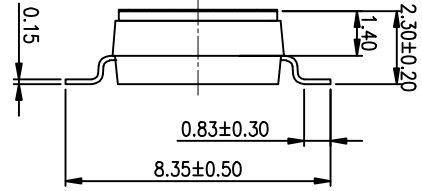


PRODUCT NO.	DSHP01TSGER
RoHS compliant	

NOTES :1.Specification:  
 1>.Operating force:1000gf Max  
 2>.Operating Temperature: -40° to+85°  
 3>.Storage Temperature: -40° to+85°  
 4>.Electrical Life:1000cycles 25mA 24VDC  
 5>.Mechanical Life:3000cycles Operations

REV.	ECN NO.	DR	DATE


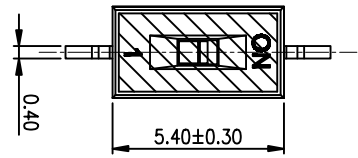


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

2. PLATING:  
 GOLD FLASH 1u"~2u" SOLDER TAIL,  
 1u"~3u" GOLD PLATING ON THE CONTACT AREA,  
 WITH 50u" NICKEL UNDERPLATING OVERALL.
3. PART NUMBER DESCRIPTION :  
 DSHP XX I S G E R

- [包装方式: T=管装 R=Reel]
- [电镀层: B=鍍鍍部1u"-3u" 焊脚部1.2u" G=鍍鍍部30u" 焊脚部30u" F=鍍鍍部10u" 焊脚部10u"
- [G=鍍全金 S=内鍍金(接触部) 外鍍锡 (焊脚部) ]
- [脚型: S脚 / J脚 / I脚 / A脚 / 2脚 ]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

[Schematic]



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	03/20/12	
DRAWING			
CHECK			
APPRO.			

總督精密有限公司  
 KINGTEK INDUSTRIAL CO.,LTD

TITLE  
 BY DSHP SERIES PITCH 1.27mm

PRODUCT FAMILY DSHP SERIES  
 PRAT NO. DSHP01TSGER

FILE NO.	DSHP01TSGER-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F-1 A