





PRODUCT NO. DSHP10TSGER
RoHS compliant

NOTES :1.Specification:



- 1> Operating force: 1000gf Max
- 2> Operating Temperature: -40° to+85°
- 3> Storage Temperature: -40° to+85°
- 4> Electrical Life: 1000cycles 25mA 24VDC
- 5> Mechanical Life: 3000cycles Operations

2. PLATING:
GOLD FLASH 1u"~2u" SOLDERTAL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. PART NUMBER DESCRIPTION :
DSHP XX I S G E R

【包装方式: T=管装 R=Reel】
【电镀层: B=鍍鍍1u"~3u" 焊脚部, 2u" G-鍍鍍30u" 焊脚部, 30u" F-鍍鍍10u" 焊脚部, 10u" S-鍍鍍10u" 焊脚部】
【G=鍍全金 S=内鍍金(接触部)外鍍锡(焊脚部)】
【脚型: S脚 / J脚 / 埋脚 / A脚 / 2脚】
【T=低推贴胶 S=低推不贴胶 L=长推】
【产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】

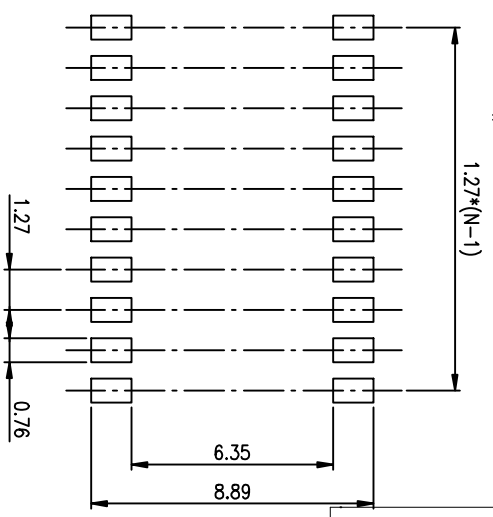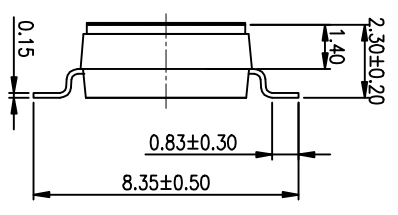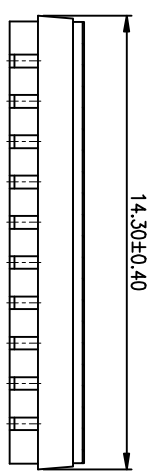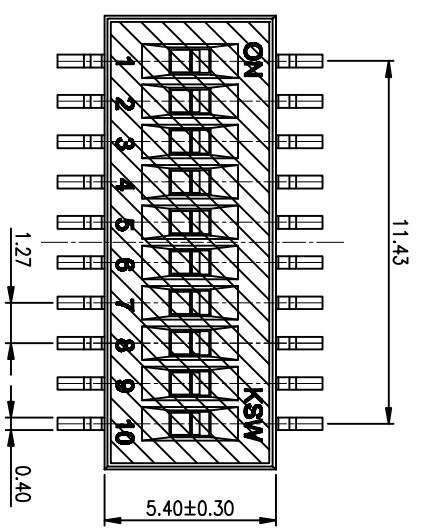

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

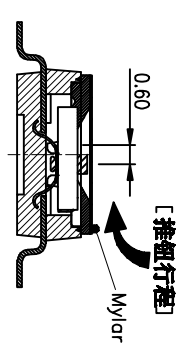

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3μt Gold
④	Terminal	Brass	1μt Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1μt~3μt Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'	⊕	
.00 ± 0.15	.0 ± 1'	⊖	
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	03/20/12	
DRAWING			
CHECK			
APPRO.			

總督精密有限公司
KINGTEK INDUSTRIAL CO.,LTD

BY DSHP SERIES PITCH 1.27mm

PRODUCT FAMILY DSHP SERIES

FILE NO. DSHP10TSGER-A
SIZE UNIT SCALE SHEET REV.
A4 mm 2 : 1 10F-1 A