

PRODUCT NO.	DSHP03TSGER
RoHS compliant	

NOTES :1.Specification:





- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical Life:1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations

2. PLATING:
GOLD FLASH 1u"~2u" SOLDERTALL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.


3. PART NUMBER DESCRIPTION :

DSHP XX I S G E R

[包装方式: T=管装 R=Reel]
 [电镀层: B=鍍鍍部1u"~3u" 焊脚部1.2u" G=鍍鍍部30u" 焊脚部30u" F=鍍鍍部10u" 焊脚部10u"
 [G=鍍全金 S=内鍍金(接触部)外镀锡(焊脚部)]
 [脚型: S脚 / J脚 / 环脚 / A脚 / 2脚]
 [T=低推贴胶 S=低推不贴胶 L=长推]
 [产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

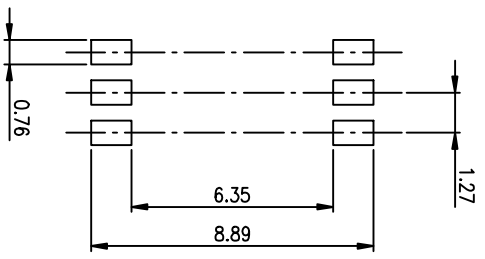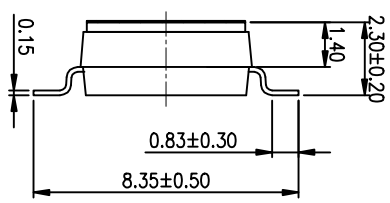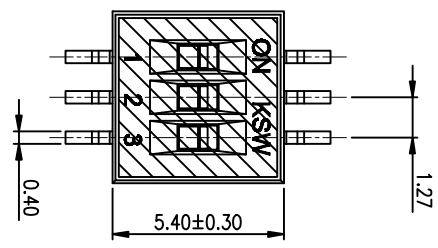


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



1	2	3	4	5	6	7
---	---	---	---	---	---	---

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylor	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		ANGLES		PROJECTION	
0 ± 0.25	0 ± 2'	0 ± 0.25	0 ± 2'	0 ± 0.15	0 ± 1'
.00 ± 0.15	.0 ± 1'	.00 ± 0.10	.00 ± 0.5'		
DESIGN		kathy		03/20/12	
DRAWING					
CHECK					
APPRO.					



1	2	3	4	5	6
---	---	---	---	---	---

總督精密有限公司
KINGTEK INDUSTRIAL CO.,LTD

BY DSHP SERIES PITCH 1.27mm

PRODUCT FAMILY DSHP SERIES

FILE NO.	DSHP03TSGER-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 TOP 1 A