

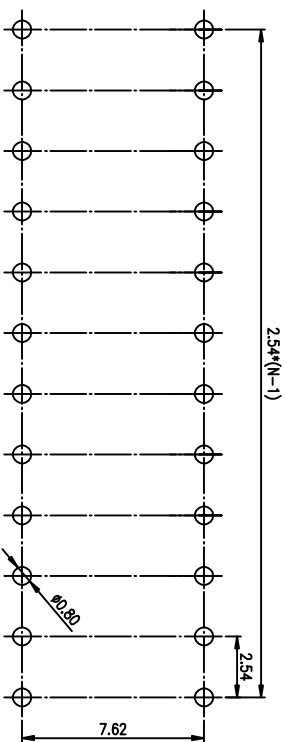


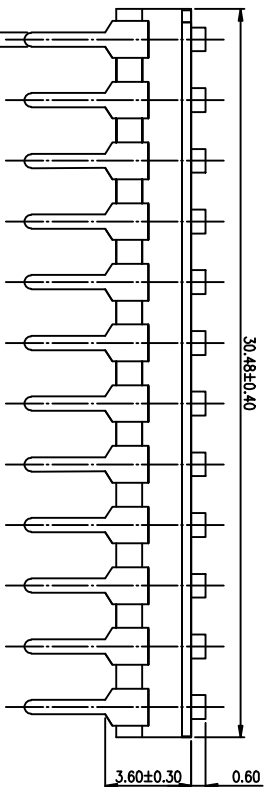


<b>PRODUCT NO.</b> DSIC121HGCT	<b>RoHS compliant</b>
-----------------------------------	-----------------------

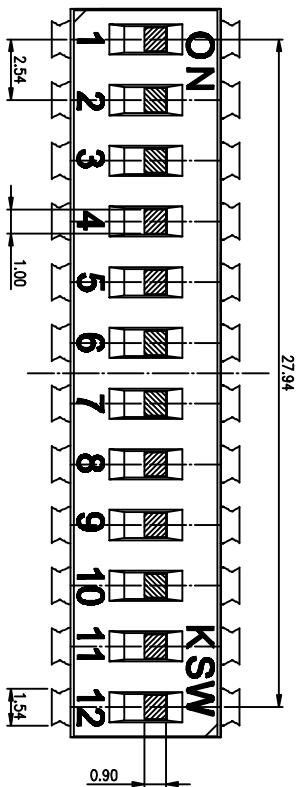

<b>REV.</b>	<b>RCN NO.</b>	<b>DR</b>	<b>DATE</b>
-------------	----------------	-----------	-------------

- NOTES :
- 1> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to +85°
    - 3> Storage Temperature: -40° to +85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles 25mA 24VDC
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 1u"~3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

- DSIC XX L H G E T
- [包装方式: T=管装 R=Reel]
  - [电镀层: B=镀镍厚1u"~3u" 焊锡层1~2u"]
  - [G=镀金 S=内金外镀]
  - [脚型: S脚 / J脚 / 直脚 / A脚 / Z脚]
  - [T=低档封装 S=低档封装 L=长档]
  - [产品公差: 01=1P 02=2P 03=3P ..... 12=12P]

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		RE 东莞市 睿业电子有限公司 Dongguan Kingtek Industrial Co., Ltd.			
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2'	PROJECTION		TITLE			
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1'	DRAWING		BY DSIC SERIES PITCH 2.54mm			
③	Movable	Copper Alloy	3u"Gold	.00± 0.10	.00± 0.5'	CHECK		PRODUCT FAMILY DSIC SERIES			
④	Terminal	Brass	1u"Gold	DESIGN		APPRO.		PRAT NO. DSIC121HGCT			
⑤	Base	UL94 V0	Black	DRAWING		FILE NO. DSIC121HGCT-A		SIZE UNIT SCALE SHEET REV.			
⑥	Terminal Contact	Brass	1u"~3u"Gold	CHECK		A4		2 : 1 1OF 1 A			