


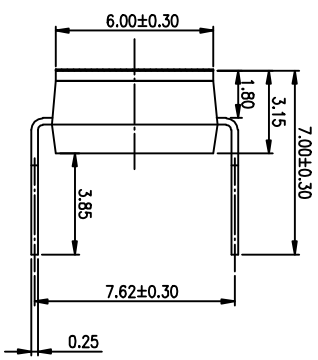
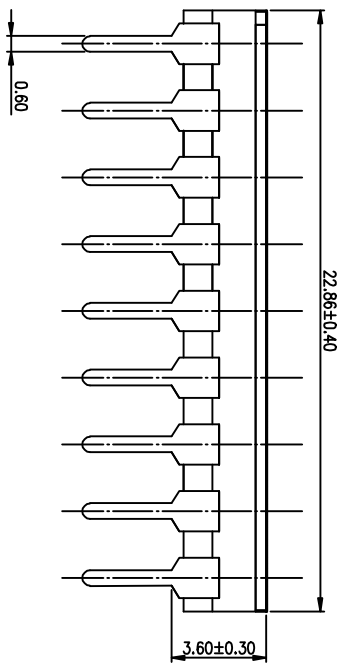


PRODUCT NO.	DSIC09THGET
RoHS compliant	

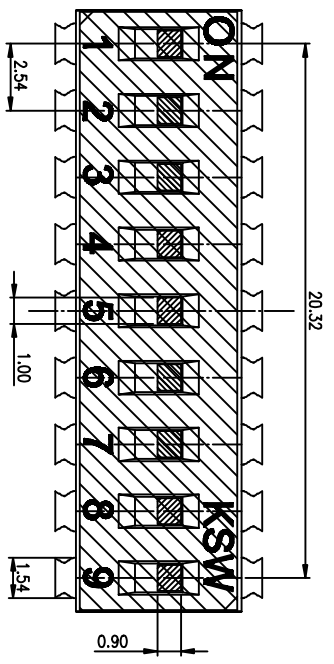


(Construction)




Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1~3u"Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY
LINER	ANGLES	PROJECTION
0 ± 0.25	0 ± 2'	
.00 ± 0.15	.0 ± 1'	
.000± 0.10	.00± 0.5'	
DESIGN	kathy	2012/04/12
DRAWING		
CHECK		
APPRO.		

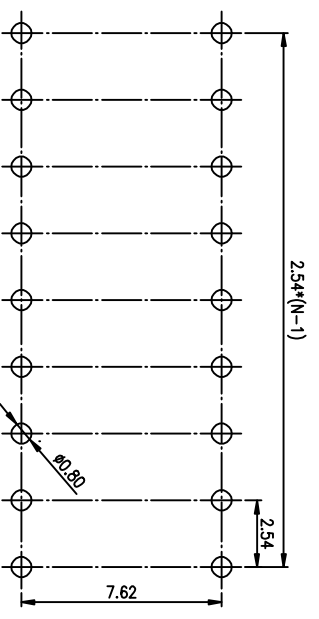

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL
 - 1~3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATING OVERALL.
 3. PART NUMBER DESCRIPTION

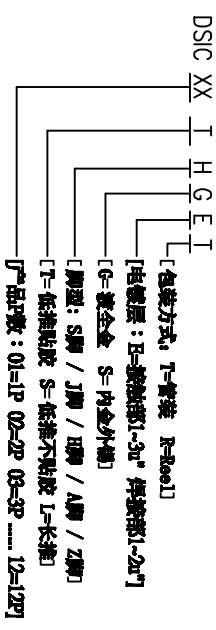

BY DSIC SERIES PITCH 2.54mm
PRODUCT FAMILY DSIC SERIES
PRAT NO. DSIC09THGET

FILE NO.	DSIC09THGET-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F-1 A